

COMMAND 600 Series

SC 630 ATC/C3 AG
SC 660 ATC/C3
SC 660 ATC/C3 AG

Demand clarity and durability

Unleash your potential with a headset that stands up to the daily demands of ATC/C3 working environments. EPOS Voice™ technology ensures excellent communication with an ultra noise-cancelling microphone – guaranteeing commands come through loud and clear.

The series delivers extreme durability for your reliable performance; its premium quality build, with steel reinforcement at vulnerable speaker joints, ensures a robust solution and the adjustable headband and leatherette ear pads maximize comfort. EPOS ActiveGard® protects your hearing, with no risk of communication drop-out, and you can switch between air and land-based communications as your work requires. With excellent communication clarity and durability, this is an audio solution that lets you to take control when it counts.

See more at eposaudio.com/command-sc600



Key benefits & features

Excellent communication with EPOS Voice™ technology

Voice enhancing technology with ultra noise-cancelling microphone for excellent voice transmission and reception

Protect your hearing with EPOS ActiveGard®

Guards against acoustic injury without risk of communication drop-out

Benefit from multi-channel communication

With two channel application for air and land-based communication on SC 660 ATC/C3 AG

Extreme durability you can rely on

With stainless steel hinge on speaker joints which lasts for the long term

Exceptional comfort throughout your shift

With fully adjustable headband and generous leatherette ear pads made to maximize comfort

COMMAND 600 Series

Product data

General

Contact pressure	SC 630: Approx. 1.0 N, SC 600: Approx. 1.5 N
Ear coupling	Supra-aural (On Ear)
Cable length	1.0 m / 3.28 ft
Weight of headset	SC 630: 77 g/2.72 oz, SC 660: 110 g/3.88 oz
Storage temperature	-55 °C - +70 °C
Operating temperature	-15 °C - +55 °C
Connector	Mini-XLR
Warranty	2 years

Microphone

Microphone type	Electret, ultra-noise cancelling
Sensitivity	-38 dBV/Pa (12.6 mV/Pa) @ 1 KHz, +/- 3 dB
Supply voltage	1-10 V DC
Frequency response	150 - 6,800 Hz



Packaging

Dimension of product packaging (W x H x D)	153 x 210 x 60 / 6.02 x 8.27 x 2.36
Package weight (incl. complete product and packaging)	SC 630: 220 g/7.76 oz, SC 660: 253 g/8.92 oz
Units in distributor master carton	20
Master carton weight incl. products	SC 630: 5.63 kg/198.59 oz, SC 660: 6.29 kg/221.87 oz
Dimension of master carton (W x H x D)	615 x 415 x 185 mm/24.21 x 16.34 x 7.28 in
Unit pack/end user	1

Content of delivery

Box content	Headset, leatherette ear pads, mounted on headset, cable/clothing clip, mounted, nylon carry pouch
-------------	--

COMMAND 600 Series

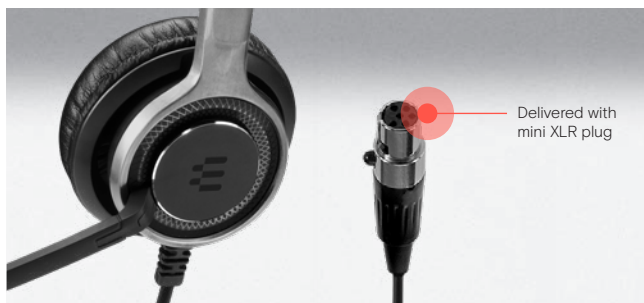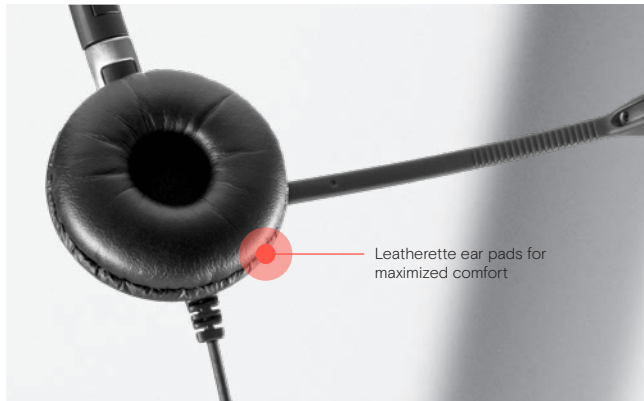

Product data

Product	SC 630 ATC/C3 AG	SC 660 ATC/C3 AG	SC 660 ATC/C3
Art. no.	1000296	1000297	1000298
EAN code	57 14708 00097 6	57 14708 00099 0	57 14708 00098 3
UPC code	8 40064 40097 8	8 40064 40099 2	8 40064 40098 5
Wearing style	SC 630: Headband with side-support. SC 660: Headband.		

Headphones

Sound pressure level:

dB SPL @ 1 kHz, 0.5 V	103	103	103
dB SPL @ 1 kHz, 1 mW	88	88	86.5
dB SPL @ 1 kHz, 1V	95,5	95,5	99,5
Max SPL	103* dB	103* dB	120 dB
THD, total harmonic distortion	<1% at 102 dB SPL at 1 kHz	<1% at 102 dB SPL at 1 kHz	<1% at 102 dB SPL at 1 kHz
Frequency response	50 – 18,000 Hz	50 – 18,000 Hz	50 – 18,000 Hz
Impedance	200 Ω	200 Ω	200 Ω

Connector pin**:

Product	SC 260/SC 660 Series	SC 230/SC 630 Series	Headset cable wire colour
Pin 1	Mic GND	Mic GND	Shield
Pin 2	Mic +	Mic +	Red
Pin 3	SPK R***	Not connected in headset	Green
Pin 4	SPK L***	SPK +	Black
Pin 5	SPK GND	SPK GND	White

* Limited by EPOS ActiveGard®

** Seen from front of mini-XLR

*** L = mic boom arm side, R = opposite mic boom arm side