

# Cables and connector assignment


for ATC and C3 headsets

See more at [eposaudio.com/command](https://eposaudio.com/command)




# Cable Guide – Raw Cables


Headset connector

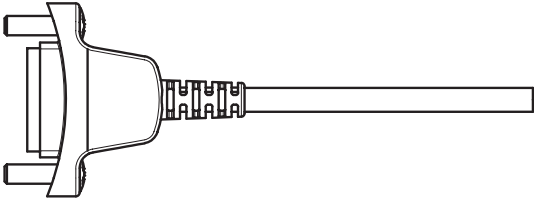

Solder side




Cable - H-6  
Cable - H-6-1 (502832)

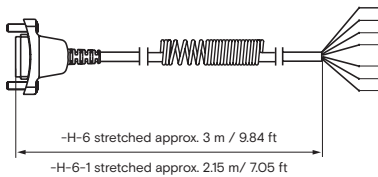


- white Audio Hi non-mic. boom side
- orange Audio Hi mic. boom side
- brown Audio Lo non-mic. boom side
- green Audio Lo mic. boom side
- red Microphone Hi
- blue Microphone Lo
- screen Screen

Cable - 6 (538743)

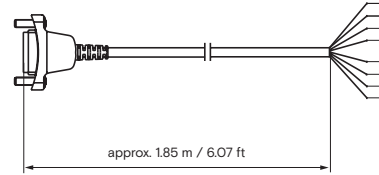


- white Audio Hi non-mic. boom side
- orange Audio Hi mic. boom side
- brown Audio Lo non-mic. boom side
- green Audio Lo mic. boom side
- yellow Not assigned
- red Microphone Hi
- blue Microphone Lo
- screen Screen

Cable - 2m ø4.0 straight (1001012)

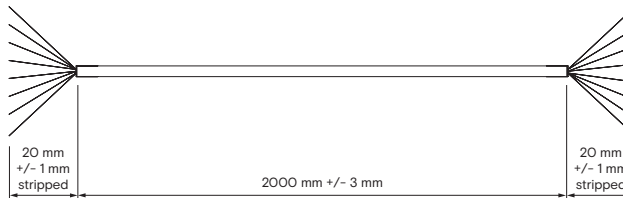


- white Audio Hi non-mic. boom side
- orange Audio Hi mic. boom side
- brown Audio Lo non-mic. boom side
- green Audio Lo mic. boom side
- red Microphone Hi
- blue Microphone Lo
- screen Screen

Cable-II-6 (508545)

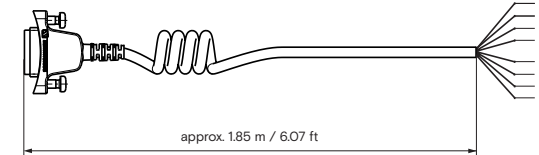

- white Audio Hi non-mic. boom side
- orange Audio Hi mic. boom side
- brown Audio Lo non-mic. boom side
- green Audio Lo mic. boom side
- yellow Not assigned
- red Microphone Hi
- blue Microphone Lo
- screen Screen


Cable - CU-0.8M-BK-WO.PL-SYS.PL (538745)

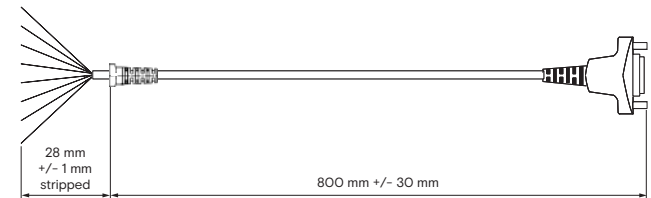


- white HP L +
- orange HP R +
- brown HP L -
- green HP R -
- yellow Not assigned
- red Microphone +
- blue Microphone -
- screen Screen

# Cable Guide – Raw Cables


Cable - H470-2000 (1000456)

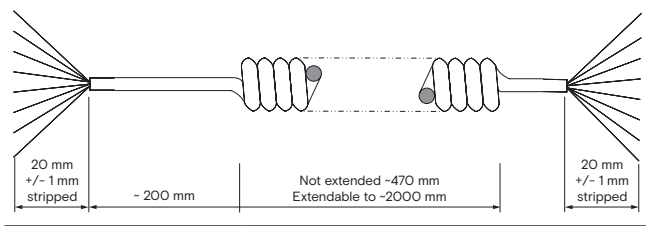

Cable - H1200-5000 (1000457)

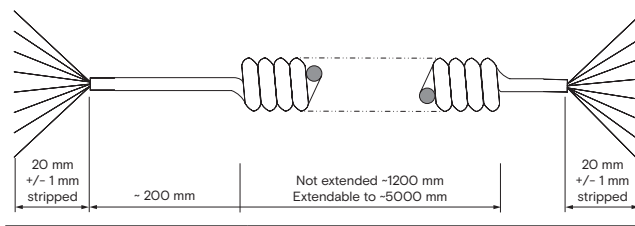


Cable - H750-3000 (1000458)

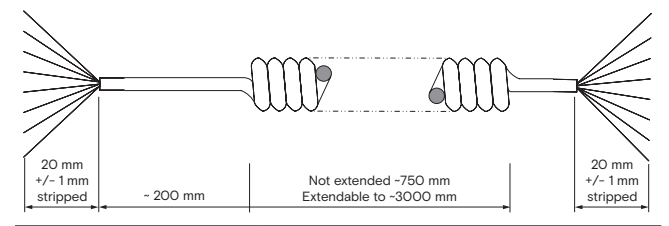


# Cable Guide – PTT 30 Solutions

Cable PTT-6 (500844)  
Cable PTT-6-1 (502418)

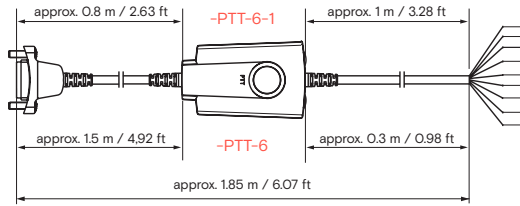


- white Audio Hi non-mic. boom side
- orange Audio Hi mic. boom side
- brown Audio Lo non-mic. boom side
- green Audio Lo mic. boom side
- yellow PTT
- black PTT
- red Microphone Hi
- blue Microphone Lo
- screen Screen

Cable - PTT-H-6-Micpre (1000379)  
Cable - PTT 32 C6 (1000373)

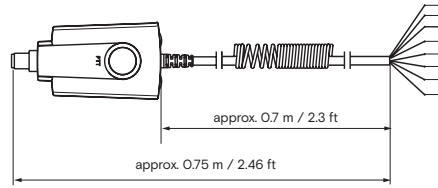


- white Audio Hi non-mic. boom side
- orange Audio Hi mic. boom side
- brown Audio Lo non-mic. boom side
- green Audio Lo mic. boom side
- yellow PTT
- red Microphone Hi
- blue Microphone Lo
- screen Screen and PTT

PTT 30 TC6BCH6Le8ST (1000311)

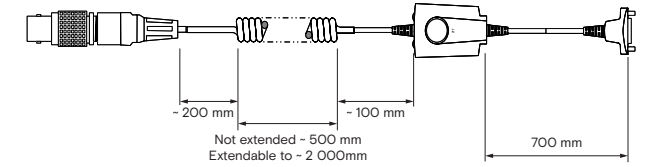


- white HP L +
- orange HP R +
- brown HP L -
- green HP R -
- yellow Not assigned
- red Microphone +
- blue Microphone -
- screen Screen

Cable - PTT 32 C6 (1000373)

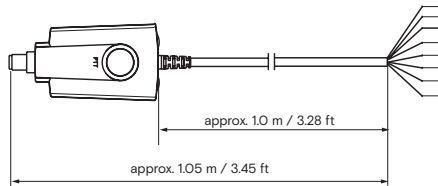


- white Audio Hi non-mic. boom side
- orange Audio Hi mic. boom side
- brown Audio Lo non-mic. boom side
- green Audio Lo mic. boom side
- yellow PTT
- red Microphone Hi
- blue Microphone Lo
- screen Screen and PTT

Cable - PTT 30 H6 (1000375)

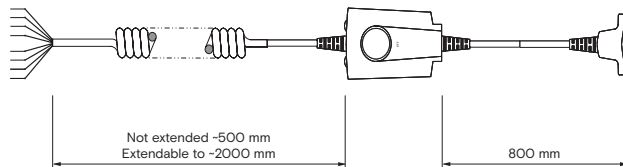

- white HP L +
- orange HP R +
- brown HP L -
- green HP R -
- yellow Not assigned
- red Microphone +
- blue Microphone -
- screen Screen

Cable - PTT 33 P (1000368)

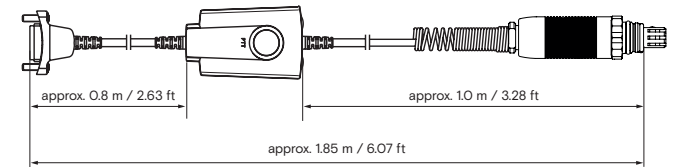

- 7-pin Nexus connector
- 1 Audio Hi mic. boom side
  - 2 PTT
  - 3 Audio Lo non-mic. both sides Ground and PTT
  - 4 Microphone Lo
  - 5 Audio Hi mic. boom side
  - 6 Microphone Hi
  - 7 NoiseGard DC + 12 V Chassis - shield